

# USER MANUAL


## 2x2 TV WALL CONTROLLER 4Kx2K



### Introduction

#### 2x2 tv wall controller 4Kx2K

The 2x2 tv wall controller , support 1-way HDMI input and 4 HDMI output, the main function is to divide a complete HDMI,HD image signal into 4 blocks and assign to 4 video display unit (such as Rear projection unit, LCD TV, etc.), Complete with 4 HDMI high-definition video display units to form a large dynamic image screen.

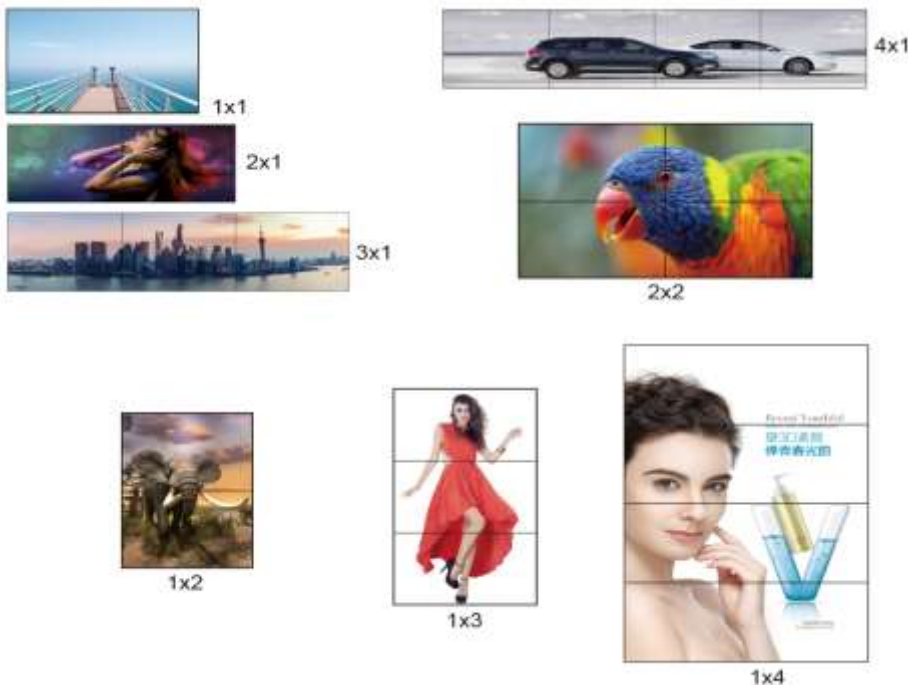


## Support modes

### Features


- \*Support 1 HDMI input
- \*Support input HDMI1.4 ; HDCP 1.4
- \*Support 4 HDMI outputs
- \*Support input 480i/480p/576p/720p/1080p/4K30hz
- \*Support output resolution 1920x1080P
- \*Support multiple splicing modes, easy to operate, plug and play
- \*Output 180 °Flip

### Physical interface diagram

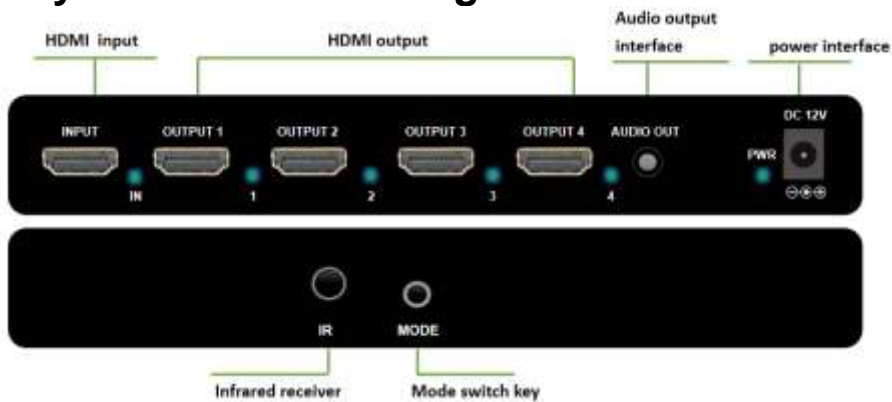

- OUTPUT 1080P → HDMI Signal Output
- 4K30Hz IN → HDMI Signal Input
- AUDIO OUT → Digital Audio Output
- DC/12V → 12V1A Power Adaptor Input
- IR → Remote Receiver
- LED → Power Light
- Mode → Different Mode Switch

### Remote controller

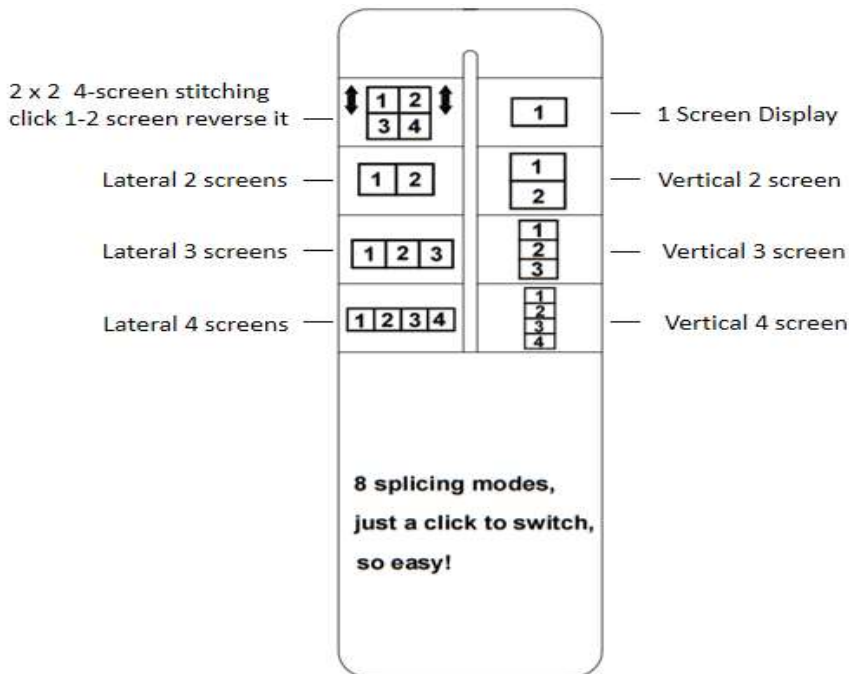

## Operation steps

- STEP 1: Connect hdmi source to hdmi input with HDMI cable,connect HDMI output to TVs.  
STEP 2: Connect 12V power adaptor.  
STEP 3: Set up splicing mode by the MODE button on the unit or remote controller.

## The Package includes

1. 2X2 tv wall controller x1
2. 12V1A Power adapter x1
3. User Manual x1
4. IR Remote Controller x1

## Connection operation

